



12918 N. Nebraska Ave.
 Tampa, FL 33612
 UEI: TK67EL9NPM09
 Cage Code: 3VCK4



POC: Michael Purner
 TO: Baldwin County
 Baldwin County EOC
 23100 McAuliffe Dr
 Robertsdale, AL 36567

Sales Quote QU0004394
 Date: 7/5/2023
 GSA Contract No.
 GS-03F-113DA

Phone: 251-213-3990
 E-Mail mike.purner@baldwincountyal.gov

Certs: SDVOSB, HUBZone SB

Qty.	Manufacturer	Item No.	Description	Unit Price	Total Price
1	Generac	MLTS-3	Mobile LED Light Tower	\$8,723.14	\$8,723.14
1	Generac	MLTS-4	Mobile LED Light Tower	\$9,220.77	\$9,220.77
1	Generac	MLT6SMDS-STD3	Mobile LED Light Tower Small body Series	\$10,361.42	\$10,361.42
1	Generac	FREIGHT	Freight cost for one unit.	\$1,365.00	\$1,365.00

FOB: Destination
 Delivery Time: 70 Days ARO

- (1) Generac MLTS-3, MLTS MITSU 1.4KW LED Light Tower No auxiliary power supply. Current lead time: 6-8 weeks ARO, subject to change.
- (1) Generac MLTS-4, MLTS MITSU 2.5KW LED Light Tower with 2.4 kW auxiliary power supply. Current lead time: 6-8 weeks ARO, subject to change.
- (1) Generac MLT6SMDS-STD3, MLT6SMDS 6kW LED Light Tower with 6kW auxiliary power supply. Current lead time: 8-10 weeks ARO, subject to change.

- *** Please see attachments for machine data and warranty information. ***
- *** Shipping to Robertsdale, AL for only one light tower included. ***
- *** Unit arrives on flatbed trailer. ***
- *** Forklift/crane needed to offload. ***
- *** Offloading is customer responsibility ***

Subtotal: \$29,670.33
 Tax: \$0.00
Total: \$29,670.33

- Terms and Conditions:
- Quote valid for 30 days
 - Terms: Net 30
 - Unless otherwise specified, full dock or off-loading capabilities required to avoid additional charges.
 - If using a purchase card, a credit card surcharge may apply.
 - Certificate of Origin/MSO will not be released until payment in full has been received.

Jay Johnson,
 O. (813)631-0000
 F. (813)631-0008
 jay@federalcontractscorp.com

ENGINE SYSTEM

- Kubota® D1005
- Diesel fueled
- EPA Final Tier 4
- 3 cylinder
- 1.0 L displacement
- Liquid cooled
- Power @ 1,800 rpm – HP (kW):
 - Prime: 11.7 (8.7)
 - Standby: 13.1 (9.8)
- Air filter: Dry type cartridge

Fuel System

- Polyethylene tank – 39.9 gal (151.04 L) capacity
- Run time – hr:
 - Lights only: 180*
 - 100% load: 59*
- Fuel consumption – gph (Lph):
 - Lights only: 0.2 (0.9)*
 - 100% load: 0.7 (2.6)*
- Exterior fill port diameter: 3.5 in (89 mm)

Cooling System

- Liquid Cooled

Lubrication System

- Oil filter: Full flow, spin-on type
- 1,000-hr service interval

**Data based on engine manufacturer and field test data after 100-hr engine break-in period. Actual results may vary, according to factors such as age and maintenance of equipment, environmental conditions, and fuel density. For fuel and maintenance recommendations, see owner's manual.*

GENERATOR

- 60 Hz engine/generator
- Marathon Electric® brushless
- Up to 6 kW output
- 120/240 VAC, 20/30 A
- ± 6% capacitor voltage regulation

CONTROLS

- External, illuminated control panel with sealed switches
- 4-position key activated switch (OFF, RUN, GLOW PLUG, START)
- Digital hour meter
- Automatic shutdown for low oil pressure and high coolant temperature
- One switch controls all light fixtures







Picture shown may not reflect actual configuration.

FLOODLIGHTS

- Four 320 W LED fixtures
- Aluminum heat sink and end caps
- Efficiency: 147 lpw
- Lm/fixture: 47,000
- Total lm: 188,000
- Coverage at 0.5 ft-c: 25,068 ft² (2,329 m²)
- IP65 rated fixtures
- Fixture-mounted drivers

Illumination Data

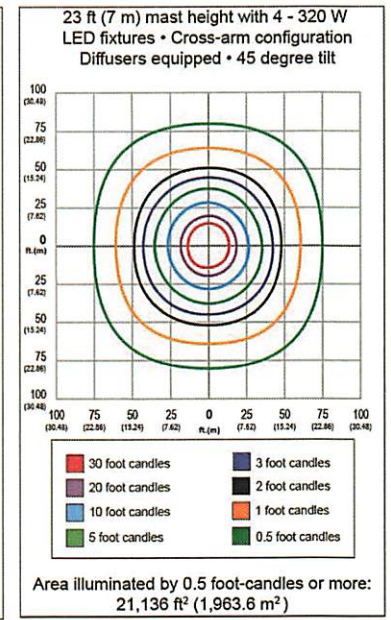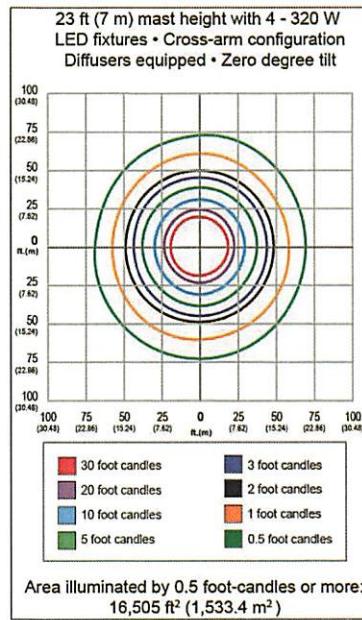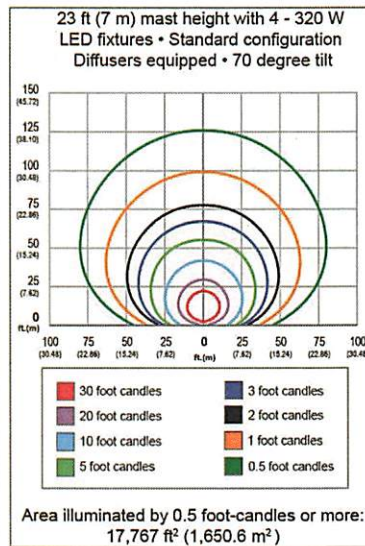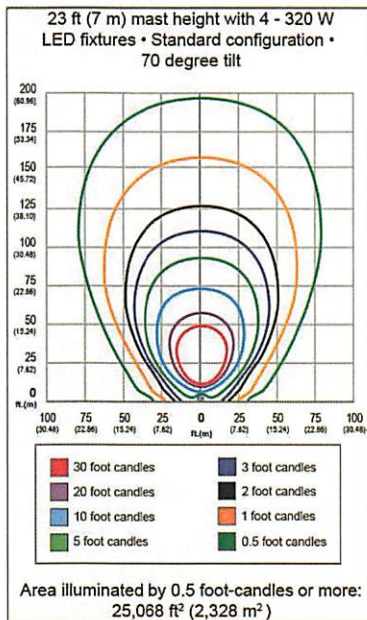

ELECTRICAL SYSTEM

- 30 A start trip breaker (ensures no-load condition exists at start-up)
- Floodlight circuits with sealed 10 A breakers
- Convenience receptacles with individual breakers:
 - One 120 VAC, 20 A, GFCI, duplex outlet (NEMA 5-20R type)
 - One 240 VAC, 30 A, twistlock outlet (NEMA L14-30Rp type)
- Wiring is sized and fused to required amperage draw
- 440 CCA wet cell battery

MAST

- Vertical operation and storage
- Five tubular steel sections with polymer guides
- Ground-adjustable light fixtures
- Winch: Dual handle, manual crank, winch cover
- Distinctive angled fixture mount for common light distribution
- Rotation: 359° range of motion, adjustable from ground during full extension
- Industrial black powder-coat finish
- Self-retracting, coiled mast cord

ENCLOSURE

- Hood:
 - Injection-molded with UV protected colorant
 - Flip-up design for ease of service
- Sound rating: 68 dB(A) at 23 ft (7 m) @ prime power
- Lifting point and fork pockets
- Multi-lingual operating and safety decals
- Illuminated license plate holder
- Document holder with owner's manual – includes AC and DC wiring diagrams


TRAILER

- Tubular steel frame
- 2 in (50 mm) ball hitch
- Three 1,200 lb (544 kg) leveling jacks – lockable in stowed positions
- 7,800 lb (3,538 kg) safety chains with spring loaded safety hooks
- DOT approved LED lights: Tail, side, brake, and directionals
- 2,200 lb (998 kg) leaf spring axle
- Molded polyethylene fenders
- Tires: ST175/80D, 13 in. rim
- Track width: 47 in (119.4 cm)

OPTIONS

- Electric winch
- Positive air shutdown
- 720 CCA AGM Optima battery
- Tandem tow
- Battery charger
- Battery disconnect
- Power Zone® controller
- Engine block heater
- Fuel filter heater
- Combination hitch (2 in. ball/2.5 in. pintle)
- 2 in. Bulldog® hitch
- 3 in. pintle hitch

DIMENSIONS

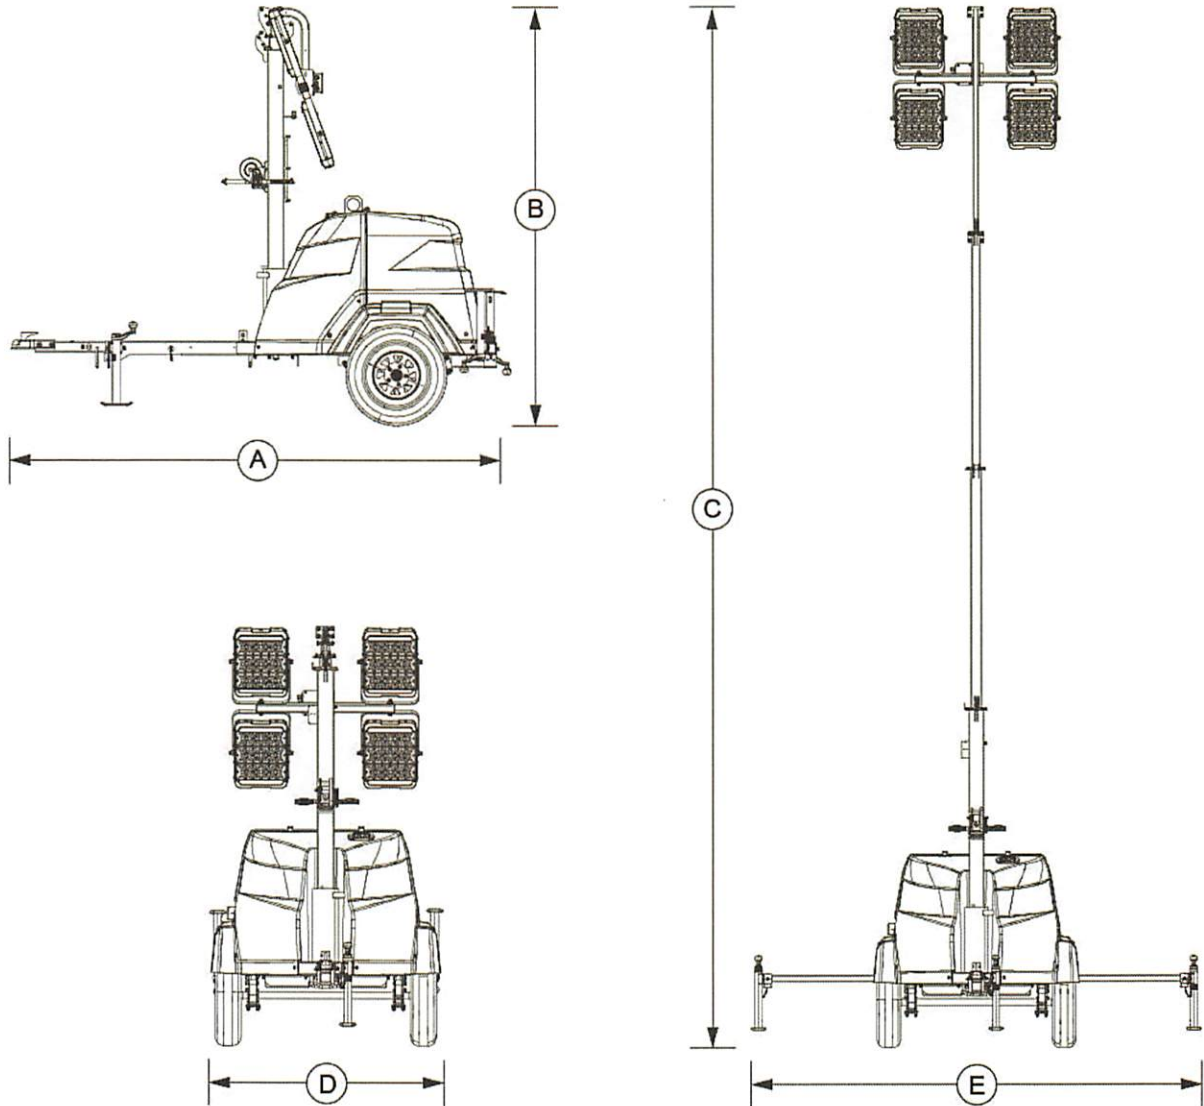

009807

A	B	C	D	E
118 in (3 m)	101 in (2.6 m)	23 ft (7 m)	57 in (1.45 m)	10 ft (3.05 m)

WEIGHT

- Dry: 1,350 lb (612 kg)
- Operating: 1,620 lb (735 kg)

AMBIENT CLIMATE RATINGS

- Maximum wind speed: 65 mph (105 km/h)
- Maximum air temperature – °F (°C):
 - Lights only: 120 (49)
 - 100% load: 104 (40)

WARRANTY

- Tower: 1 year, unlimited hours/2 years, 2,000 hours
- LED modules and drivers: 5 year limited warranty

CERTIFICATIONS

CSA approved, listed

FOR MORE INFORMATION

Owner's manual is available at www.generacmobileproducts.com/resources-tools/manuals.