
Voting Precinct No. 55 Location: Ono Island - Orange Beach Contact Person: Shanon Telephone Number(s): WATER NO **POWER** NO YES **RESTROOMS** NO YES A/C NO HEAT NO NO PROFESSIONAL CLEANING SERVICES NECESSARY YES HANDICAP ACCESSIBILITY (Attach ADA Checklist) NO **PARKING** NO MISCELLANEOUS/NOTES Precinct Inspected by:

_____ Date: _6-17日/



Americans with Disabilities Act

ADA CHECKLIST FOR POLLING PLACES

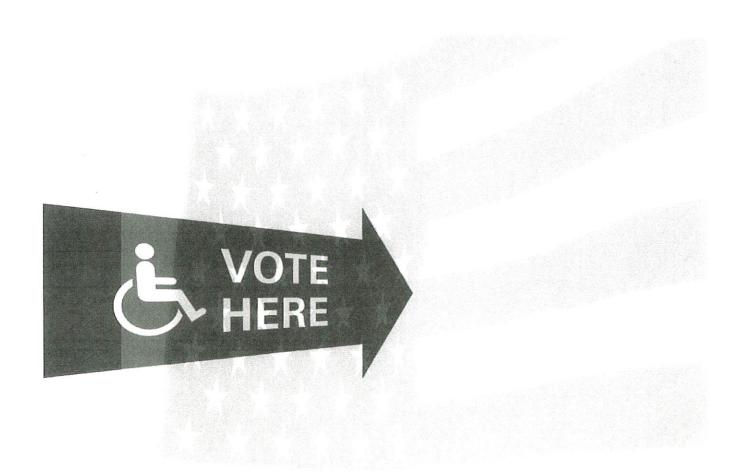

Part 3 : Polling Place Accessibility Checklist

Ward: Precinct: Staff: Date: Time:
Address: 3/692 Dolphin Dr. Location name:
This checklist is designed to provide guidance for determining whether a polling place has basic accessibility features needed by voters with disabilities.
For each question below there are citations to the 2010 ADA Standards for Accessible Design (2010 Standards). Please review the 2010 Standards for all requirements.
There are some differences between the 1991 ADA Standards for Accessible Design (1991 Standards) and the 2010 Standards. Elements and spaces in a building constructed or altered before March 15, 2012, that complied with the 1991 Standards may remain in compliance with the 2010 Standards. See 28 C.F.R. §35.150(b)(2) for more information.
In completing the checklist, provide a measurement for every question with a "no" answer. Where a question asks about more than one element, provide a note in the comments explaining any noncompliant elements.
Status of Polling Place
All Elements Compliant
Non-Compliant Elements Remediable with Temporary Measures
Non-Compliant Elements Not Remediable with Temporary Measures (Relocate Polling Place)

Ward:	Precinct:	Staff:	Date:	_ Time:
Address:		Locatio	n name:	

Α	Only complete this section if off-street parking is provided to voters. If off-street parking is not provided to voters, go to Section B. If more than 25 parking spaces are provided to voters, see the 2010 Standards for the number of accessible parking spaces required. (§208.2)	Yes	No	N/A	Comments/ Remedies
A1	Is there at least one designated van accessible space with signage with the International Symbol of Accessibility and designated "van accessible"? (§§208.2, 208.2.4, 502.6)				need a sign to designate
A2	Are the designated van accessible spaces at least 96" wide with a 96" wide access aisle, or 132" wide with a 60" wide access aisle? (§§502.2, 502.3) Width of space Width of access aisle	/			
А3	For van accessible spaces (particularly in a garage or parking structure), is there vertical clearance of at least 98" for the vehicular route to the parking space, in the parking space and access aisle, and along the vehicular route to the exit? (§502.5)	/		9	
A4	Are designated accessible parking spaces and the access aisles serving them on a level surface, with slopes not exceeding 1:48 in all directions? (Note: Curb ramps may not be part of an access aisle since they include slopes greater than 1:48.) (§502.4)	/			
A5	Are the surfaces of the designated accessible parking spaces and access aisles stable, firm, and slip resistant? (§§502.4, 302.1)	/			
A6	Are the designated accessible parking spaces located on the shortest accessible route to the accessible entrance? (§208.3.1)	/			

Ward:	Precinct:	Staff:	Date:	Time:
Address:			Location name:	

В	Passenger Drop-Off Area Only complete this section if a passenger drop-off area is provided for voters. If a drop-off area is not provided to voters, go to Section C.	Yes	No	N/A	Comments/ Remedies
B1	Is the vehicle pull-up space on a level surface, with slopes not exceeding 1:48 in all directions? (§503.4)	/			
B2	Is the access aisle next to the vehicle pull-up space on a level surface, with a slope not exceeding 1:48 in all directions? (§503.4)	/			
B3	Is there vertical clearance of at least 114" (9 feet 6 inches) from the site entrance to the vehicle pull-up area, in the access aisle, and along the vehicular route to the exit? (\$503.5)	/			
B4	Is a curb ramp provided if a curb separates the access aisle from the accessible route to the accessible entrance? (§§206.2.1, 503.3)			/	
B5	Is the width of the curb ramp surface at least 36" (not counting the side flares)? (§405.5)			/	
B6	Does an accessible route connect the access aisle and curb ramp to the accessible entrance of the polling place? (§206.2)			/	

Ward:	Precinct:	Staff:		Date:	Time:	
Address:			Locatio	n name:		

С	Exterior Route to Accessible Entrance Complete a separate Exterior Route form, when applicable, for the routes from 1) parking, 2) passenger drop-off areas, 3) public sidewalks and 4) public transportation stops. Exterior route location:	Yes	No	N/A	Comments/ Remedies
C1	Is the route at least 36" wide? (§403.5.1)	/			
C2	Is the route free of abrupt changes in level greater than ½", including stairs? (§303)	/			
C3	Is the route free of surface openings greater than ½", such as grates or holes in the pavement? (\$302.3)	/			
C4	Are walking surfaces stable, firm, and slip resistant? (§302.1)	/			
C5	Is the route free of wall mounted objects that protrude more than 4" into the path of travel and are between 27" and 80" high? (§307.2)	/			
C6	Is the route free of post mounted objects that protrude more than 12" into the path of travel and are between 27" and 80" high? (§307.3)				
C7	Are objects that hang over the pedestrian route 80" or higher, including the underside of exterior stairs? (\$307.4)	/			
C8	Is the cross slope of the accessible route no greater than 1:48? (§§403.3, 405.3)	/			
C9	If the route crosses a curb, is there a curb ramp that is at least 36" wide with a slope no more than 1:12? (§§303.4, 405.2, 405.5, 406.1)			/	
C10	Is the running slope of part of the route greater than 1:20? If yes, go to Section G. (§402.2)	/			
C11	Is the cross slope of the accessible route no greater than 1:48? (§§403.3, 405.3)				

Ward:	Precinct:	Staff:	Date:	Time:
Address:			Location name:	

D	Polling Place Entrances	Yes	No	N/A	Comments/ Remedies
D1	Is the clear width of the door opening (one door or one active leaf of a double door) at least 32"? (§404.2.3)	/			
D2	Is each door hardware useable with one hand without tight grasping, pinching, or twisting of the wrist? (§§309.4, 404.2.7)	/			
D3	On the pull side of the door, is there at least 18" of clearance provided to the side of the latch? (§404.2.4)	/			
D4	Is the area in front of the door level, with slopes no greater than 1:48 in all directions? (§§404.2.4.4, 405.7.1)	/			
D5	If there are doors in a series, is the distance between the two hinged doors at least 48" plus the width of the door swinging into the space? (§404.2.6)			/	
D6	Can the second door (interior door) in the series be opened with no more than 5 pounds of force? (§309.4)			1	
D7	Does the second door (interior door) in the series comply with D2, D3, and D4, above?			/	
D8	Are door thresholds no higher than $\frac{1}{2}$ "? (Note: If the threshold is between $\frac{1}{4}$ " and $\frac{1}{2}$ " it must be beveled.) (§404.2.5)	/			
D9	Do inaccessible entrances have signage directing voters to the accessible entrance? (§216.6)	/			
D10	If voters are directed to an alternative accessible entrance, is this entrance kept unlocked during voting hours? (28 C.F.R. §§35.130, 35.133)	/			

Ward:	Precinct:	Staff:	Date:	Time:	_
Address:			Location name:		

Е	Route from Entrance Into Voting Area	Yes	No	N/A	Comments/ Remedies
E1	Is the route at least 36" wide? (§403.5.1)	/			
E2	Is the route free of wall mounted objects that protrude more than 4" into the path of travel and are between 27" and 80" high? (§307.2)	/			
E3	Is the route free of post mounted objects that protrude more than 12" into the path of travel and are between 27" and 80" high? (§307.3)	/			
E4	Are objects that hang over the route 80" or higher, including the underside of stairs? (§307.4)	/			
E5	Is the route free of abrupt changes in level greater than ½", including stairs? (§303)	/			
E6	Is the running slope of part of the route greater than 1:20? If yes, go to Section G. (§303.4)		/		
E7	If the route to the voting area has stairs, is a platform lift or elevator provided? If yes, go to Section H (lifts) or Section I (elevators). (§402.2)			/	
E8	If doors are provided along the route to the voting area, is the clear width of each door opening (one door or one active leaf of a double door) at least 32"? (§404.2.3)	/			
E9	Is each door hardware useable with one hand without tight grasping, pinching, or twisting of the wrist? (§§309.4, 404.2.7)	/			
E10	Can each door be opened with no more than 5 pounds of force? (§309.4)	1			
E11	Is the threshold at each door no higher than ½"? (Note: If the threshold is between ¼" and ½" it must be beveled.) (\$404.2.5)	/			
E12	On the pull side of each door, is there at least 18" of clearance provided to the side of the latch? (§404.2.4)	/			
E13	Is the area in front of each door level, with slopes no greater than 1:48 in all directions? (§§404.2.4.4, 405.7.1)	/			

Ward:	Precinct:	Staff:	Date:	Time:
Address:			Location name:	

F	Within the Voting Area	Yes	No	N/A	Comments/ Remedies
F1	Are floor surfaces stable, firm, and slip resistant? (§302.1)	/			
F2	Is the route free of wall mounted objects that protrude more than 4" into the path of travel and are between 27" and 80" high? (§307.2)	/			
F3	Is the route free of post mounted objects that protrude more than 12" into the path of travel and are between 27" and 80" high? (§307.3)	/			
F4	Are objects that hang over the route 80" or higher, including the underside of stairs? (§307.4)	/			
F5	Is there enough room to provide a route at least 36" wide to the registration table and voting stations? (§403.5.1)	/			
F6	Is there enough room to provide a turning space in front of at least one voting station, such as a circle that is at least 60" in diameter? (§304.3)	/			
F7	Is there enough room to provide a turning space in front of at least one accessible voting machine, such as a circle that is at least 60" in diameter? (§304.3)	/			

Ward:	Precinct:	Staff:	Date:	Time:
Address:			Location name:	

G	Ramps Complete a separate ramp form for each ramp, whether exterior or interior. Ramp location:	Yes	No	N/A	Comments/ Remedies
G1	Is the running slope of the ramp no greater than 1:12? (§405.2)				
G2	Is the cross slope of the ramp 1:48 or less? (§405.3)				
G3	Is the rise (height) for any ramp run 30" or less? (§405.6)				
G4	Is the ramp, measured between handrails, at least 36" wide? (§405.5)				
G5	Does the ramp have a level landing that is at least 60" long, at the top and bottom of each ramp section? (§405.7)				
G6	For every 30" of rise, is a level landing at least 60" long provided? (§§405.6, 405.7)				
G7	Is a level landing, at least 60" by 60" provided where the ramp changes direction? (§405.7.4)				
G8	If the rise of the ramp is greater than 6", are handrails provided that are between 34" and 38" above the ramp surface? (§§405.8, 505.4)				
G9	If the rise of the ramp is greater than 6" and the ramp or landing has a vertical drop-off on either side of the ramp, is edge protection provided? (§405.9)				

Ward:	Precinct:	Staff:	Date:	Time:
Address:			Location name:	

Н	Lifts	Yes	No	N/A	Comments/ Remedies
H1	Is the lift operational at the time of the survey? (28 C.F.R. §§35.130, 35.133)			ı	
H2	Is the lift independently operable, or can it be made so during Election Day? (§410.1)				
НЗ	Is there 30" by 48" of clear floor space within the lift? (§§410.3, 305.3)				
H4	Are the controls for the lift no higher than 48"? (§§410.5, 309.3, 308)				
H5	Are the controls useable with one hand without tight grasping, pinching or twisting? (§§410.5, 309.4)				
Н6	Is the clear width of the door opening/gate opening at the end of the lift at least 32"? If a side door/gate is provided, is the clear opening width at least 42"? (§410.6)				

Ward:	Precinct:	Staff:	Date:	Time:
Address:			Location name:	

-	Elevators	Yes	No	N/A	Comments/ Remedies
11	Is the elevator car door opening at least 36" wide? (§407.3.6, Table 407.4.1)				
12	Is there space to maneuver within the eleva- tor car, e.g., 51" deep and 68" wide; OR 80" deep and 54" wide; OR 60" deep and 60" wide? (§407.4.1)				
13	Are hallway elevator call buttons 48" high or lower? (§§407.2.1.1, 308.2, 308.3)				
14	Are elevator car controls 48" high or lower? (§§407.4.6.1, 308.2, 308.3)				
15	Does the elevator have visible and audible signals in the hallway to indicate the arrival and direction of the elevator car? (§407.2.2.1)				
16	Does the elevator have visible and audible signals within the elevator car to indicate the position of the car? (§407.4.8)				