

EXHIBIT "A"


FAIRHOPE FALLS PH. 8 & 9 ENGINEER'S MAINTENANCE BOND ESTIMATE

ITEM NO.	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	AMOUNT
GRADING & DRAINAGE					
1	UNCLASSIFIED EXCAVATION (ROADWAYS)	CYIP	11,230	\$ 4.00	\$ 44,920.00
2	UNCLASSIFIED EXCAVATION (DITCHES/SWALES)	CYIP	1,544	\$ 4.00	\$ 6,176.00
3	18" REINFORCED CONCRETE PIPE, CLASS 3	LF	1,340	\$ 58.50	\$ 78,390.00
4	24" REINFORCED CONCRETE PIPE, CLASS 3	LF	849	\$ 86.25	\$ 73,226.25
5	30" REINFORCED CONCRETE PIPE, CLASS 3	LF	676	\$ 124.00	\$ 83,824.00
6	TYPE S-1 INLET	EA	31	\$ 4,060.00	\$ 125,860.00
7	YARD INLET	EA	8	\$ 4,775.00	\$ 38,200.00
8	DRAINAGE JUNCTION BOX	EA	1	\$ 12,320.00	\$ 12,320.00
9	CONCRETE DITCH	LF	1,002	\$ 44.00	\$ 44,088.00
SUB-TOTAL GRADING & DRAINAGE:					\$ 507,004.25
ROADWAYS					
10	LOWER SAND / CLAY BASE MATERIAL, ALDOT 301-A, TYPE A, 4" THICK	SY	12,147	\$ 2.75	\$ 33,404.25
11	UPPER SAND / CLAY BASE MATERIAL, ALDOT 301-A, TYPE A, 4" THICK	SY	9,081	\$ 2.75	\$ 24,972.75
12	PRIME COAT, ALDOT 401-A, TYPE A, 0.25 GAL/SY	SY	9,081	\$ 4.00	\$ 36,324.00
13	BITUMINOUS CONCRETE WEARING SURFACE, ALDOT 424-A, 220 LBS/SY	SY	9,081	\$ 22.00	\$ 199,782.00
14	TYPE 'A'- 2'-6" CONCRETE VALLEY GUTTER	LF	7,874	\$ 28.00	\$ 220,472.00
15	CONCRETE SIDEWALK, 5' WIDE	LF	7,750	\$ 29.00	\$ 224,750.00
16	CONCRETE CURB RAMP	EA	22	\$ 1,250.00	\$ 27,500.00
17	STOP SIGN W/POST	EA	4	\$ 450.00	\$ 1,800.00
18	STREET NAME SIGN	EA	8	\$ 325.00	\$ 2,600.00
SUB-TOTAL ROADWAYS:					\$ 771,605.00
GRAND TOTAL:					\$ 1,278,609.25

I certify the above estimate to be true and correct to the best of my knowledge.

Baldwin County requires a 2year maintenance bond at 40% of the total: **\$ 511,443.70.**

Sincerely,
Dewberry Engineers Inc.

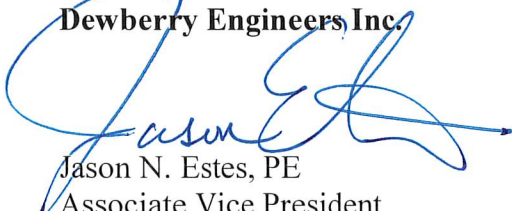

Jason N. Estes, PE
Associate Vice President
Branch Manager



JNE/ck

STAMP